


## LINE ITEM QUOTES

The following is a schedule of the windows and doors for this project. For additional unit details, please see Line Item Quotes. Additional charges, tax or Terms and Conditions may apply. Detail pricing is per unit. All the window units to have mullions of 1-5/8" thick as stated in the architectural drawings.

Line #1	Mark Unit:			
Qty: 3				

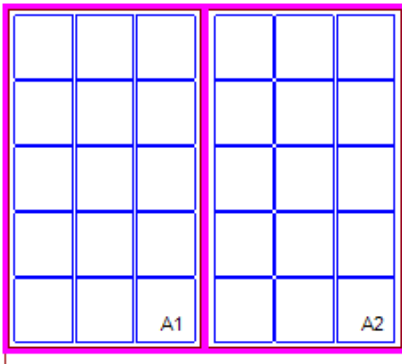

As Viewed From The Exterior

**Entered As:** MO  
**FS** 120 3/8" X 104"  
**RO** 121 3/8" X 104 1/2"  
**Egress Information A1, A2**  
 No Egress Information available.

Clay Clad Exterior  
 Primed Pine Interior  
 2W1H - Rectangle Assembly  
 Assembly Masonry Opening  
 120 7/8" X 108 25/32"  
 Assembly Rough Opening  
 121 3/8" X 104 1/2"  
 Prep for Field Mull Assembly  
 Mull Kit(s) Included  
 Sub Assembly 1 - 1W1H  
 Basic Frame 60" x 104"  
 Unit Locations: A1  
 Sub Assembly 2 - 1W1H  
 Basic Frame 60" x 104"  
 Unit Locations: A2

Unit: A1  
 Ultimate Casement Picture  
 Basic Frame 60" X 104"  
 Rough Opening 61" X 104 1/2"  
 Clay Clad Sash Exterior  
 Primed Pine Sash Interior  
 IG - 3/4"  
 Tempered Low E3 w/Argon  
 Black Perimeter and Spacer Bar  
 7/8" SDL - With Spacer Bar - Black  
 Rectangular - Special Cut 3W5H  
 Clay Clad Ext - Primed Pine Int  
 Ogee Interior Glazing Profile  
 Standard Bottom Rail  
 Black Weather Strip  
 Solid Wood Covers


Unit: A2  
 Ultimate Casement Picture  
 Basic Frame 60" X 104"  
 Rough Opening 61" X 104 1/2"  
 Clay Clad Sash Exterior  
 Primed Pine Sash Interior  
 IG - 3/4"  
 Tempered Low E3 w/Argon  
 Black Perimeter and Spacer Bar  
 7/8" SDL - With Spacer Bar - Black  
 Rectangular - Special Cut 3W5H  
 Clay Clad Ext - Primed Pine Int  
 Ogee Interior Glazing Profile  
 Standard Bottom Rail  
 Black Weather Strip  
 Solid Wood Covers  
 Vertical Mull Reinforcement 3/8"  
 Mull 1 - Prep for Vertical Mull Reinforcement 3/8" - 104" Long  
 Standard Mull Charge  
 4 9/16" Jamb  
 Clay A1451 Subsill  
 Nailing Fin

\*\*\*Note: This configuration meets a minimum structural performance of DP 20

through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.

\*\*\*Note: Unit Availability and Price is Subject to Change

Line #2	Mark Unit:			
Qty: 2				

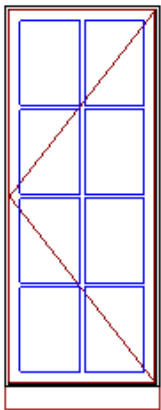


As Viewed From The Exterior

**Entered As:** FS  
 FS 30" X 74"  
 RO 31" X 74 1/2"  
**Egress Information**  
 Width: 22 57/64" Height: 68 57/64"  
 Net Clear Opening: 10.95 SqFt

Clay Clad Exterior  
 Primed Pine Interior  
 Ultimate Casement - Left Hand  
 Frame Size 30" X 74"  
 Standard CN Width 30  
 Rough Opening 31" X 74 1/2"  
 Clay Clad Sash Exterior  
 Primed Pine Sash Interior  
 IG - 3/4"  
 Tempered Low E3 w/Argon  
 Black Perimeter and Spacer Bar  
 7/8" SDL - With Spacer Bar - Black  
 Rectangular - Special Cut 2W4H  
 Clay Clad Ext - Primed Pine Int  
 Ogee Interior Glazing Profile  
 Standard Bottom Rail  
 Black Weather Strip  
 White Folding Handle  
 White Multi - Point Lock  
 Aluminum Screen  
 White Surround  
 Charcoal Fiberglass Mesh  
 4 9/16" Jambs  
 Clay A1451 Subsill  
 Nailing Fin  
 \*\*\*Note: Unit Availability and Price is Subject to Change

Line #3	Mark Unit:			
Qty: 2				

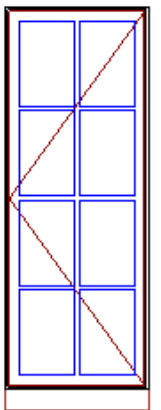

As Viewed From The Exterior


**Entered As:** FS  
 FS 30" X 80"  
 RO 31" X 80 1/2"  
**Egress Information**  
 Width: 22 57/64" Height: 74 57/64"

Clay Clad Exterior  
 Primed Pine Interior  
 Ultimate Casement - Left Hand  
 Frame Size 30" X 80"  
 Standard CN Width 30  
 Rough Opening 31" X 80 1/2"  
 Clay Clad Sash Exterior  
 Primed Pine Sash Interior  
 IG - 3/4"  
 Tempered Low E3 w/Argon  
 Black Perimeter and Spacer Bar  
 7/8" SDL - With Spacer Bar - Black  
 Rectangular - Special Cut 2W4H  
 Clay Clad Ext - Primed Pine Int  
 Ogee Interior Glazing Profile  
 Standard Bottom Rail  
 Black Weather Strip  
 White Folding Handle  
 White Multi - Point Lock  
 Aluminum Screen  
 White Surround  
 Charcoal Fiberglass Mesh  
 4 9/16" Jambs  
 Clay A1451 Subsill

Net Clear Opening: 11.90 SqFt

Nailing Fin  
 \*\*\*Note: Unit Availability and Price is Subject to Change

Line #4	Mark Unit:			
Qty: 3				

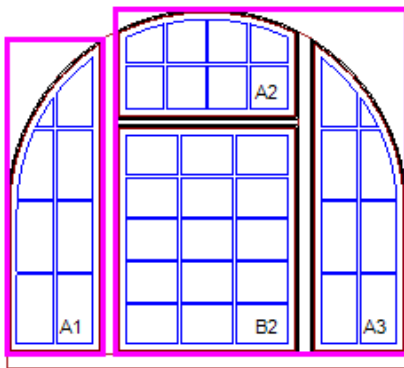

As Viewed From The Exterior

**Entered As:** RO  
**FS** 119" X 102 1/2"  
**RO** 120" X 103"  
**Egress Information A1, A2, A3, B2**  
 No Egress Information available.

Clay Clad Exterior  
 Primed Pine Interior .....  
 3W2H - RT2 Assembly  
 Assembly Rough Opening  
 120" X 103"  
 RO Springline from bottom: 43"  
 Uneven Header  
 Prep for Field Mull Assembly .....  
 Mull Kit(s) Included  
 Sub Assembly 1 - 1W1H  
 Basic Frame 28 1/2" x 93 25/32"  
 Unit Locations: A1  
 Sub Assembly 2 - 2W2H  
 Basic Frame 86 1/2" x 102 1/2"  
 Unit Locations: A2,A3,B2

Unit: A1 .....  
 Ultimate Casement Picture Round Top - RT23  
 Basic Frame 28 1/2" X 93 25/32"  
 Basic Frame Radius: 59 1/2"  
 Basic Frame Springline from bottom: 43"  
 Rough Opening 29 1/2" X 94 43/64"  
 Clay Clad Sash Exterior  
 Primed Pine Sash Interior  
 IG - 3/4" .....  
 Tempered Low E3 w/Argon  
 Black Perimeter and Spacer Bar  
 7/8" SDL - With Spacer Bar - Black .....  
 Rectangular - Special Cut 2W4H  
 8 Rect Lites  
 Clay Clad Ext - Primed Pine Int  
 Ogee Interior Glazing Profile  
 Standard Bottom Rail  
 Black Weather Strip  
 Solid Wood Covers

Unit: A2 .....  
 Ultimate Casement Picture Round Top - RT6  
 Basic Frame 54" X 32 1/2"  
 Basic Frame Springline from bottom: 26 1/64"  
 Rough Opening 55" X 33"  
 Clay Clad Sash Exterior  
 Primed Pine Sash Interior  
 IG - 3/4" .....  
 Tempered Low E3 w/Argon  
 Black Perimeter and Spacer Bar  
 7/8" SDL - With Spacer Bar - Black .....  
 Rectangular - Special Cut 4W2H  
 8 Rect Lites  
 Clay Clad Ext - Primed Pine Int  
 Ogee Interior Glazing Profile  
 Standard Bottom Rail  
 Black Weather Strip  
 Solid Wood Covers

Unit: A3 .....  
Ultimate Casement Picture Round Top - RT24  
Basic Frame 28 1/2" X 93 25/32"  
Basic Frame Radius: 59 1/2"  
Basic Frame Springline from bottom: 43"  
Rough Opening 29 1/2" X 94 43/64"  
Clay Clad Sash Exterior  
Primed Pine Sash Interior  
IG - 3/4" .....  
Tempered Low E3 w/Argon  
Black Perimeter and Spacer Bar  
7/8" SDL - With Spacer Bar - Black.....  
Rectangular - Special Cut 2W4H  
8 Rect Lites  
Clay Clad Ext - Primed Pine Int  
Ogee Interior Glazing Profile  
Standard Bottom Rail  
Black Weather Strip  
Solid Wood Covers

Unit: B2 .....  
Ultimate Casement Picture  
Basic Frame 54" X 68"  
Rough Opening 55" X 68 1/2"  
Clay Clad Sash Exterior  
Primed Pine Sash Interior  
IG - 3/4" .....  
Tempered Low E3 w/Argon  
Black Perimeter and Spacer Bar  
7/8" SDL - With Spacer Bar - Black.....  
Rectangular - Special Cut 3W5H  
Clay Clad Ext - Primed Pine Int  
Ogee Interior Glazing Profile  
Standard Bottom Rail  
Black Weather Strip  
Solid Wood Covers  
Horizontal Structural Mull 2" .....  
Vertical Solid Space Mull 4" .....  
Mull 1 - Prep for Vertical Solid Space Mull 4" - 96 1/64" Long  
Standard Mull Charge.....  
W1144 Interior Trim Primed Pine.....  
4 9/16" Jambs  
Clay A1451 Subsill.....  
Nailing Fin

\*\*\*Note: This configuration meets a minimum structural performance of DP 20 through either physical testing or calculations in accordance with AAMA 450 and building code requirements. Mull certification ratings may vary from individual unit certification ratings. Reference the mulling chapter of the ADM for additional information.


\*\*\*Note: Unit Availability and Price is Subject to Change

## PRODUCT AND PERFORMANCE INFORMATION


NFRC energy ratings and values may vary depending on the exact configuration of glass thickness used on the unit. This data may change over time due to ongoing product changes or updated test results or requirements.

The National Fenestration Rating Council (NFRC) has developed and operates a uniform national rating system for the energy performance of fenestration products, including windows and doors. For additional information regarding this rating system, see [www.nfrc.org](http://www.nfrc.org).

Review the map below to determine if your units meet ENERGY STAR for your location.

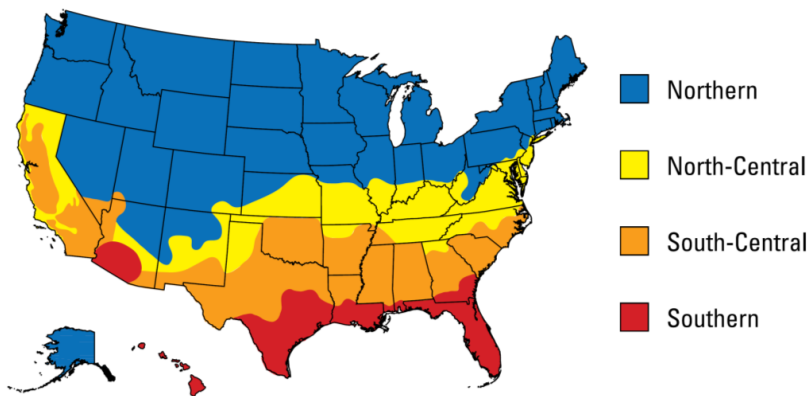

### International Energy Conservation Code (IECC) Climate Regions

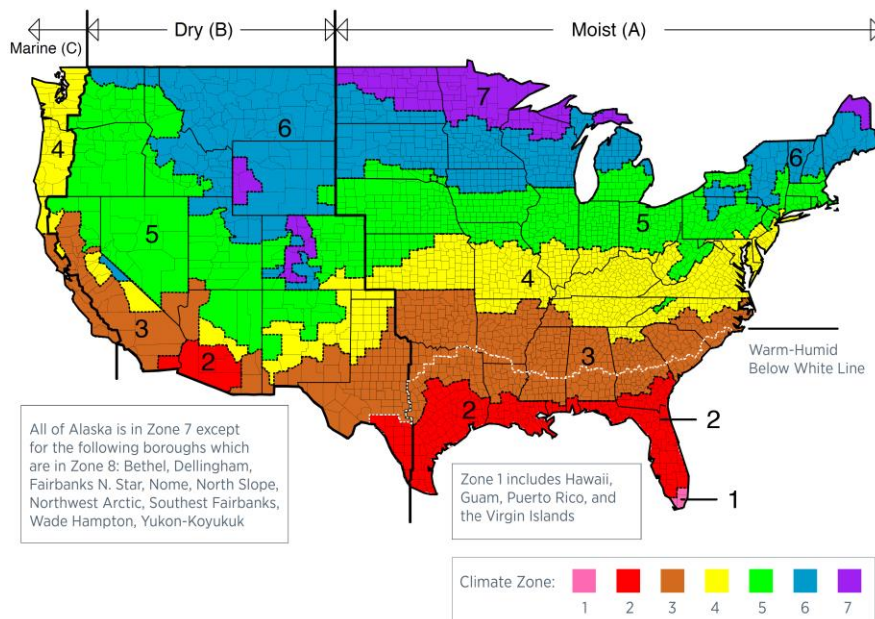




---

## CALIFORNIA USERS

### About California Proposition 65

California's Proposition 65 entitles California consumers to special warnings for products that contain chemicals known to the state of California to cause cancer and birth defects or other reproductive harm.

We are providing the following warnings in connection with this quote:

-  **WARNING:** This product can expose you to chemicals including titanium dioxide, which is known to the State of California to cause cancer. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).
-  **WARNING:** This product can expose you to chemicals including methanol, which is known to the State of California to cause birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).
-  **WARNING:** Drilling, sawing, sanding or machining wood products can expose you to wood dust, a substance known to the State of California to cause cancer. Avoid inhaling wood dust or use a dust mask or other safeguards for personal protection. For more information go to [www.P65Warnings.ca.gov/wood](http://www.P65Warnings.ca.gov/wood).