

**NOTES:**

- CONTACT SOLID WASTE DIVISION FOR APPOINTMENT TO ESTABLISH ACCESS AND IMPROVEMENTS REQUIRED AS CONDITIONS OF PROVIDING DISPOSAL SERVICE. 621-6888.
- THE SANITARY SEWER SERVICES, WATER, GAS AND ANY OTHER UNDERGROUND SERVICE CONNECTIONS SHALL BE COMPLETED IN ALL AREAS TO BE PAVED PRIOR TO PLACEMENT OF ASPHALT CONCRETE ON SITE.
- ALL HANDICAPPED PARKING STALLS SHALL BE PLACED ADJACENT TO FACILITY ACCESS RAMPS OR IN STRATEGIC AREAS WHERE THE HANDICAPPED SHALL NOT HAVE TO WHEEL OR WALK BEHIND PARKING VEHICLES WHILE TRAVELING TO OR FROM HANDICAPPED PARKING STALLS AND RAMPS.
- ANY SURVEY MONUMENTS WITHIN THE AREA OF CONSTRUCTION SHALL BE PRESERVED OR RESET BY A PERSON LICENSED TO PRACTICE LAND SURVEYING IN THE STATE OF CALIFORNIA.
- LIGHTING SHALL BE PROVIDED TO ILLUMINATE PARKING, SALES OR DISPLAY AREAS WHERE BE HOODED AND SO ARRANGED AND CONTROLLED SO AS NOT TO CAUSE A NUISANCE EITHER TO HIGHWAY TRAFFIC OR TO THE LIVING ENVIRONMENT. THE SPECIFICATIONS AND TYPES OF LIGHTING FIXTURES TO BE INSTALLED ON THE SITE SHALL BE SUBMITTED AND APPROVED BY THE PLANNING DEPARTMENT PRIOR TO ISSUANCE OF THE BUILDING PERMITS. THE AMOUNT OF LIGHT SHALL BE PROVIDED ACCORDING TO THE STANDARDS OF THE DEPARTMENT OF PUBLIC WORKS, THE PLANNING AND DEVELOPMENT DEPARTMENT AND THE FRESNO POLICE DEPARTMENT.
- ALL SIGN PROPOSALS TO BE SUBMITTED TO PLANNING DEPARTMENT FOR SEPARATE SIGN REVIEW PRIOR TO INSTALLATION FOR VERIFICATION OF COMPLIANCE WITH ZONING ORDINANCES.
- TWO MEANS OF INGRESS/EGRESS MUST BE MAINTAINED DURING ALL PHASES OF DEVELOPMENT.
- ANY UTILITIES REQUIRING RELOCATION SHALL BE THE RESPONSIBILITY AND AT THE EXPENSE OF THE DEVELOPER. FIRE HYDRANTS WILL BE RELOCATED BY CITY FORCES. DEVELOPER IS RESPONSIBLE TO NOTIFY CITY WATER DIVISION AT 621-5300 TO ARRANGE AND COORDINATE WORK.
- NO USES OF LAND, BUILDING OR STRUCTURES OTHER THAN THOSE SPECIFICALLY APPROVED PURSUANT TO THIS SITE PLAN SHALL BE PERMITTED.
- ALL GATES ON COMMON ACCESS DRIVES AND ALL PEDESTRIAN GATES, WHERE REQUIRED SHALL BE EQUIPPED WITH APPROVED POLICE/FIRE BYPASS LOCKS (BEST LOCKS: PADLOCK 21B700 SERIES OR CYLINDER LOCK 1W7B2).
- LANDSCAPING SHALL BE MAINTAINED IN GOOD HEALTH. TREES MAY NOT BE TRIMMED OR PRUNED TO REDUCE THE NATURAL HEIGHT OR OVERALL CROWN OF THE TREE, EXCEPT AS NECESSARY FOR THE HEALTH OF THE TREE AND PUBLIC SAFETY; OR AS MAY OTHERWISE BE APPROVED BY THE DEVELOPMENT DEPARTMENT.
- LANDSCAPING MUST BE IN PLACE BEFORE ISSUANCE OF THE CERTIFICATE OF OCCUPANCY. A HOLD ON OCCUPANCY SHALL BE PLACED ON THE PROPOSED DEVELOPMENT UNTIL SUCH TIME THAT LANDSCAPING HAS BEEN APPROVED AND VERIFIED FOR PROPER INSTALLATION BY THE PLANNING DIVISION.
- SIGNS, OTHER THAN DIRECTIONAL SIGNS, ARE NOT APPROVED FOR INSTALLATION AS PART OF THIS SPECIAL PERMIT. SUBMIT FOR A SEPARATE MASTER SIGN PROGRAM OR SIGN REVIEW APPLICATION. APPLICATIONS AND REQUIREMENTS FOR SUBMITTAL ARE AVAILABLE AT THE PLANNING DIVISION'S PUBLIC FRONT COUNTER.
- A BACKFLOW PREVENTION DEVICE IS REQUIRED! CONTACT WATER DIVISION AT 621-5300 FOR REQUIREMENTS; DEVICES MUST BE INSTALLED ON-SITE IN A LOCATION APPROVED BY THE CROSS CONNECTION CONTROL OFFICER; A PLUMBING PERMIT IS REQUIRED TO INSTALL DEVICE; BACKFLOW PREVENTION DEVICES REQUIRED SHALL BE INSTALLED AT CONSUMER'S EXPENSE BY A QUALIFIED JOURNEYPERMAN PLUMBER CERTIFIED AS COMPETENT FOR SUCH PURPOSES BY THE WATER SYSTEMS MANAGER; BACKFLOW DEVICES MUST BE TESTED AND ACCEPTED BY THE WATER DIVISION PRIOR TO GRANTING BUILDING FINAL; DEVELOPER IS RESPONSIBLE TO CONTACT THE WATER DIVISION A MINIMUM OF 5 DAYS PRIOR TO REQUEST FOR FINAL BUILDING INSPECTION.
- AS REQUIRED BY THE CALIFORNIA ADMINISTRATION CODE (TITLE 24), AN UNOBSTRUCTED 4-FOOT MINIMUM PATH OF TRAVEL ALONG THE PUBLIC SIDEWALK WITHIN THE LIMITS OF THE PROPERTY IS PROVIDED.
- RAMP AND SIDE SLOPES SHALL BE ROUGH BROOM FINISH PARALLEL TO GROOVING.
- DESIGN AND CONSTRUCT PARKING LOT PAVEMENT TO PUBLIC WORKS STANDARDS P-21, P-22 AND P-23.
- IF ARCHAEOLOGICAL AND/OR ANIMAL FOSSIL MATERIAL IS ENCOUNTERED DURING PROJECT SURVEYING, GRADING, EXCAVATING, OR CONSTRUCTION, WORK SHALL STOP IMMEDIATELY.
- APPROVAL OF THIS SPECIAL PERMIT MAY BECOME NULL AND VOID IN THE EVENT THAT DEVELOPMENT IS NOT COMPLETED IN ACCORDANCE WITH ALL THE CONDITIONS AND REQUIREMENTS IMPOSED ON THIS SPECIAL PERMIT, THE ZONING ORDINANCE, AND ALL PUBLIC WORKS STANDARDS AND SPECIFICATIONS. THE PLANNING AND DEVELOPMENT SHALL NOT ASSUME RESPONSIBILITY FOR ANY DELETIONS OR OMISSIONS RESULTING FROM THE SPECIAL PERMIT REVIEW PROCESS OR FOR ADDITION OF STANDARDS TO CONSTRUCTION PLAN NOT SPECIFICALLY SUBMITTED AND REVIEWED AND APPROVED PURSUANT TO THIS SPECIAL PERMIT OR SUBSEQUENT AMENDMENTS OR REVISIONS.
- NO STRUCTURES OF ANY KIND (INCLUDING SIGNS, TRASH AND RECYCLING, ETC.) MAY BE INSTALLED OR MAINTAINED WITHIN THE LANDSCAPED AREAS. NO EXPOSED UTILITY BOXES, TRANSFORMERS, METERS, PIPING (EXCEPTING THE BACKFLOW PREVENTION DEVICE), ETC., ARE ALLOWED TO BE LOCATED IN THE LANDSCAPE AREAS OR SETBACKS OR ON THE STREET FRONTS OF THE BUILDINGS. ALL TRANSFORMERS, ETC., SHALL BE SHOWN ON THE SITE PLAN. THE BACKFLOW DEVICE SHALL BE SCREENED BY LANDSCAPING OR SUCH OTHER MEANS AS MAY BE APPROVED.
- ALL FUTURE PROPOSED FENCES, HEDGES AND WALLS, ETC. SHALL BE REVIEWED AND APPROVED BY THE CITY OF FRESNO, PLANNING AND DEVELOPMENT DEPARTMENT PRIOR TO INSTALLATION.
- IF THERE ARE SUSPECTED HUMAN REMAINS, THE FRESNO COUNTY CORONER SHALL BE IMMEDIATELY CONTACTED. IF THE REMAINS OR OTHER ARCHAEOLOGICAL MATERIAL IS POSSIBLY NATIVE AMERICAN IN ORIGIN, THE NATIVE AMERICAN HERITAGE COMMISSION (PHONE: 916/653-4082) SHALL BE IMMEDIATELY CONTACTED, AND THE CALIFORNIA ARCHAEOLOGICAL INVENTORY/SOUTHERN SAN JOAQUIN VALLEY INFORMATION CENTER (PHONE: 805/644-2289) SHALL BE CONTACTED TO OBTAIN A REFERRAL LIST OF RECOGNIZED ARCHAEOLOGISTS. AN ARCHAEOLOGICAL ASSESSMENT SHALL BE CONDUCTED FOR THE PROJECT. THE SITE SHALL BE FORMALLY RECORDED, AND RECOMMENDATIONS MADE TO THE CITY AS TO ANY FURTHER SITE INVESTIGATION OR SITE AVOIDANCE/PRESERVATION.
- ALL CONSTRUCTION WORK ON THIS PROJECT IS SUBJECT TO INTERRUPTION IF THE ROAD SYSTEM BECOMES IMPASSABLE FOR FIRE APPARATUS DUE TO RAIN OR OTHER OBSTACLES. ALL REQUIRED FIRE ACCESS LANES SHALL BE PROVIDED AND MAINTAINED WITH AN APPROVED "ALL WEATHER" SURFACE CAPABLE OF SUPPORTING 80,000 LB. VEHICLES (MINIMUM 4" OF BASE ROCK OVER COMPACTED OR UNDISTURBED SOIL OR PER APPROVED ENGINEERED PLANS) YEAR-ROUND AND WITH 24 FEET MINIMUM WIDTH OR OTHER APPROVED METHOD THAT WOULD PREVENT SHOULDER DEGRADATION.
- IF ANIMAL FOSSILS ARE UNCOVERED, THE MUSEUM OF PALEONTOLOGY, U.C. BERKELEY SHALL BE CONTACTED TO OBTAIN A REFERRAL LIST OF RECOGNIZED PALEONTOLOGISTS. A PALEONTOLOGIST SHALL CONDUCT AN ASSESSMENT AND, IF THE PALEONTOLOGIST DETERMINES THE MATERIAL TO BE SIGNIFICANT, IT SHALL BE PRESERVED.

- THE ACCESSIBLE PATH OF TRAVEL AS DELINEATED IS A BARRIER-FREE ROUTE 48" MINIMUM IN WIDTH WITH NO ABRUPT LEVEL CHANGES EXCEEDING 1/2" UNLESS BEVELED AT A 1:2 MAXIMUM SLOPE, AND NO VERTICAL LEVEL CHANGES EXCEEDING 1/4". THE CROSS SLOPE DOES NOT EXCEED 2% AND SLOPE IN THE DIRECTION OF TRAVEL DOES NOT EXCEED 5%. THE SURFACE IS FIRM, STABLE AND SLIP RESISTANT. THE ACCESSIBLE PATH OF TRAVEL IS FREE OF OVERHANGING OBSTRUCTIONS BELOW 80" AND OBJECTS PROTRUDING GREATER THAN 4" FROM A WALL ABOVE 27" AND BELOW 80". THE ARCHITECT SHALL VERIFY EXISTING CONDITIONS AND DELINEATE ANY REQUIRED UPGRADES INCLUDING THOSE FOR CURB RAMPS PER CBC 1127B.5.
- CONSTRUCT CONCRETE DRIVEWAY APPROACH TO PUBLIC WORKS STANDARD(S) P-2 AND P-6.
- CONSTRUCT CONCRETE CURB RAMP TO PUBLIC WORKS STANDARD(S) P-28 AND P-32.
- TO BE DEEDED FOR PUBLIC STREET PURPOSES BY THE RECORDING OF TRACT NO. 6160.



**ALTERNATIVE SITE PLAN**

**614 WEST SAN JOSE AVENUE**

APN 417-140-21

TRACT NO. 6160

C-16-062

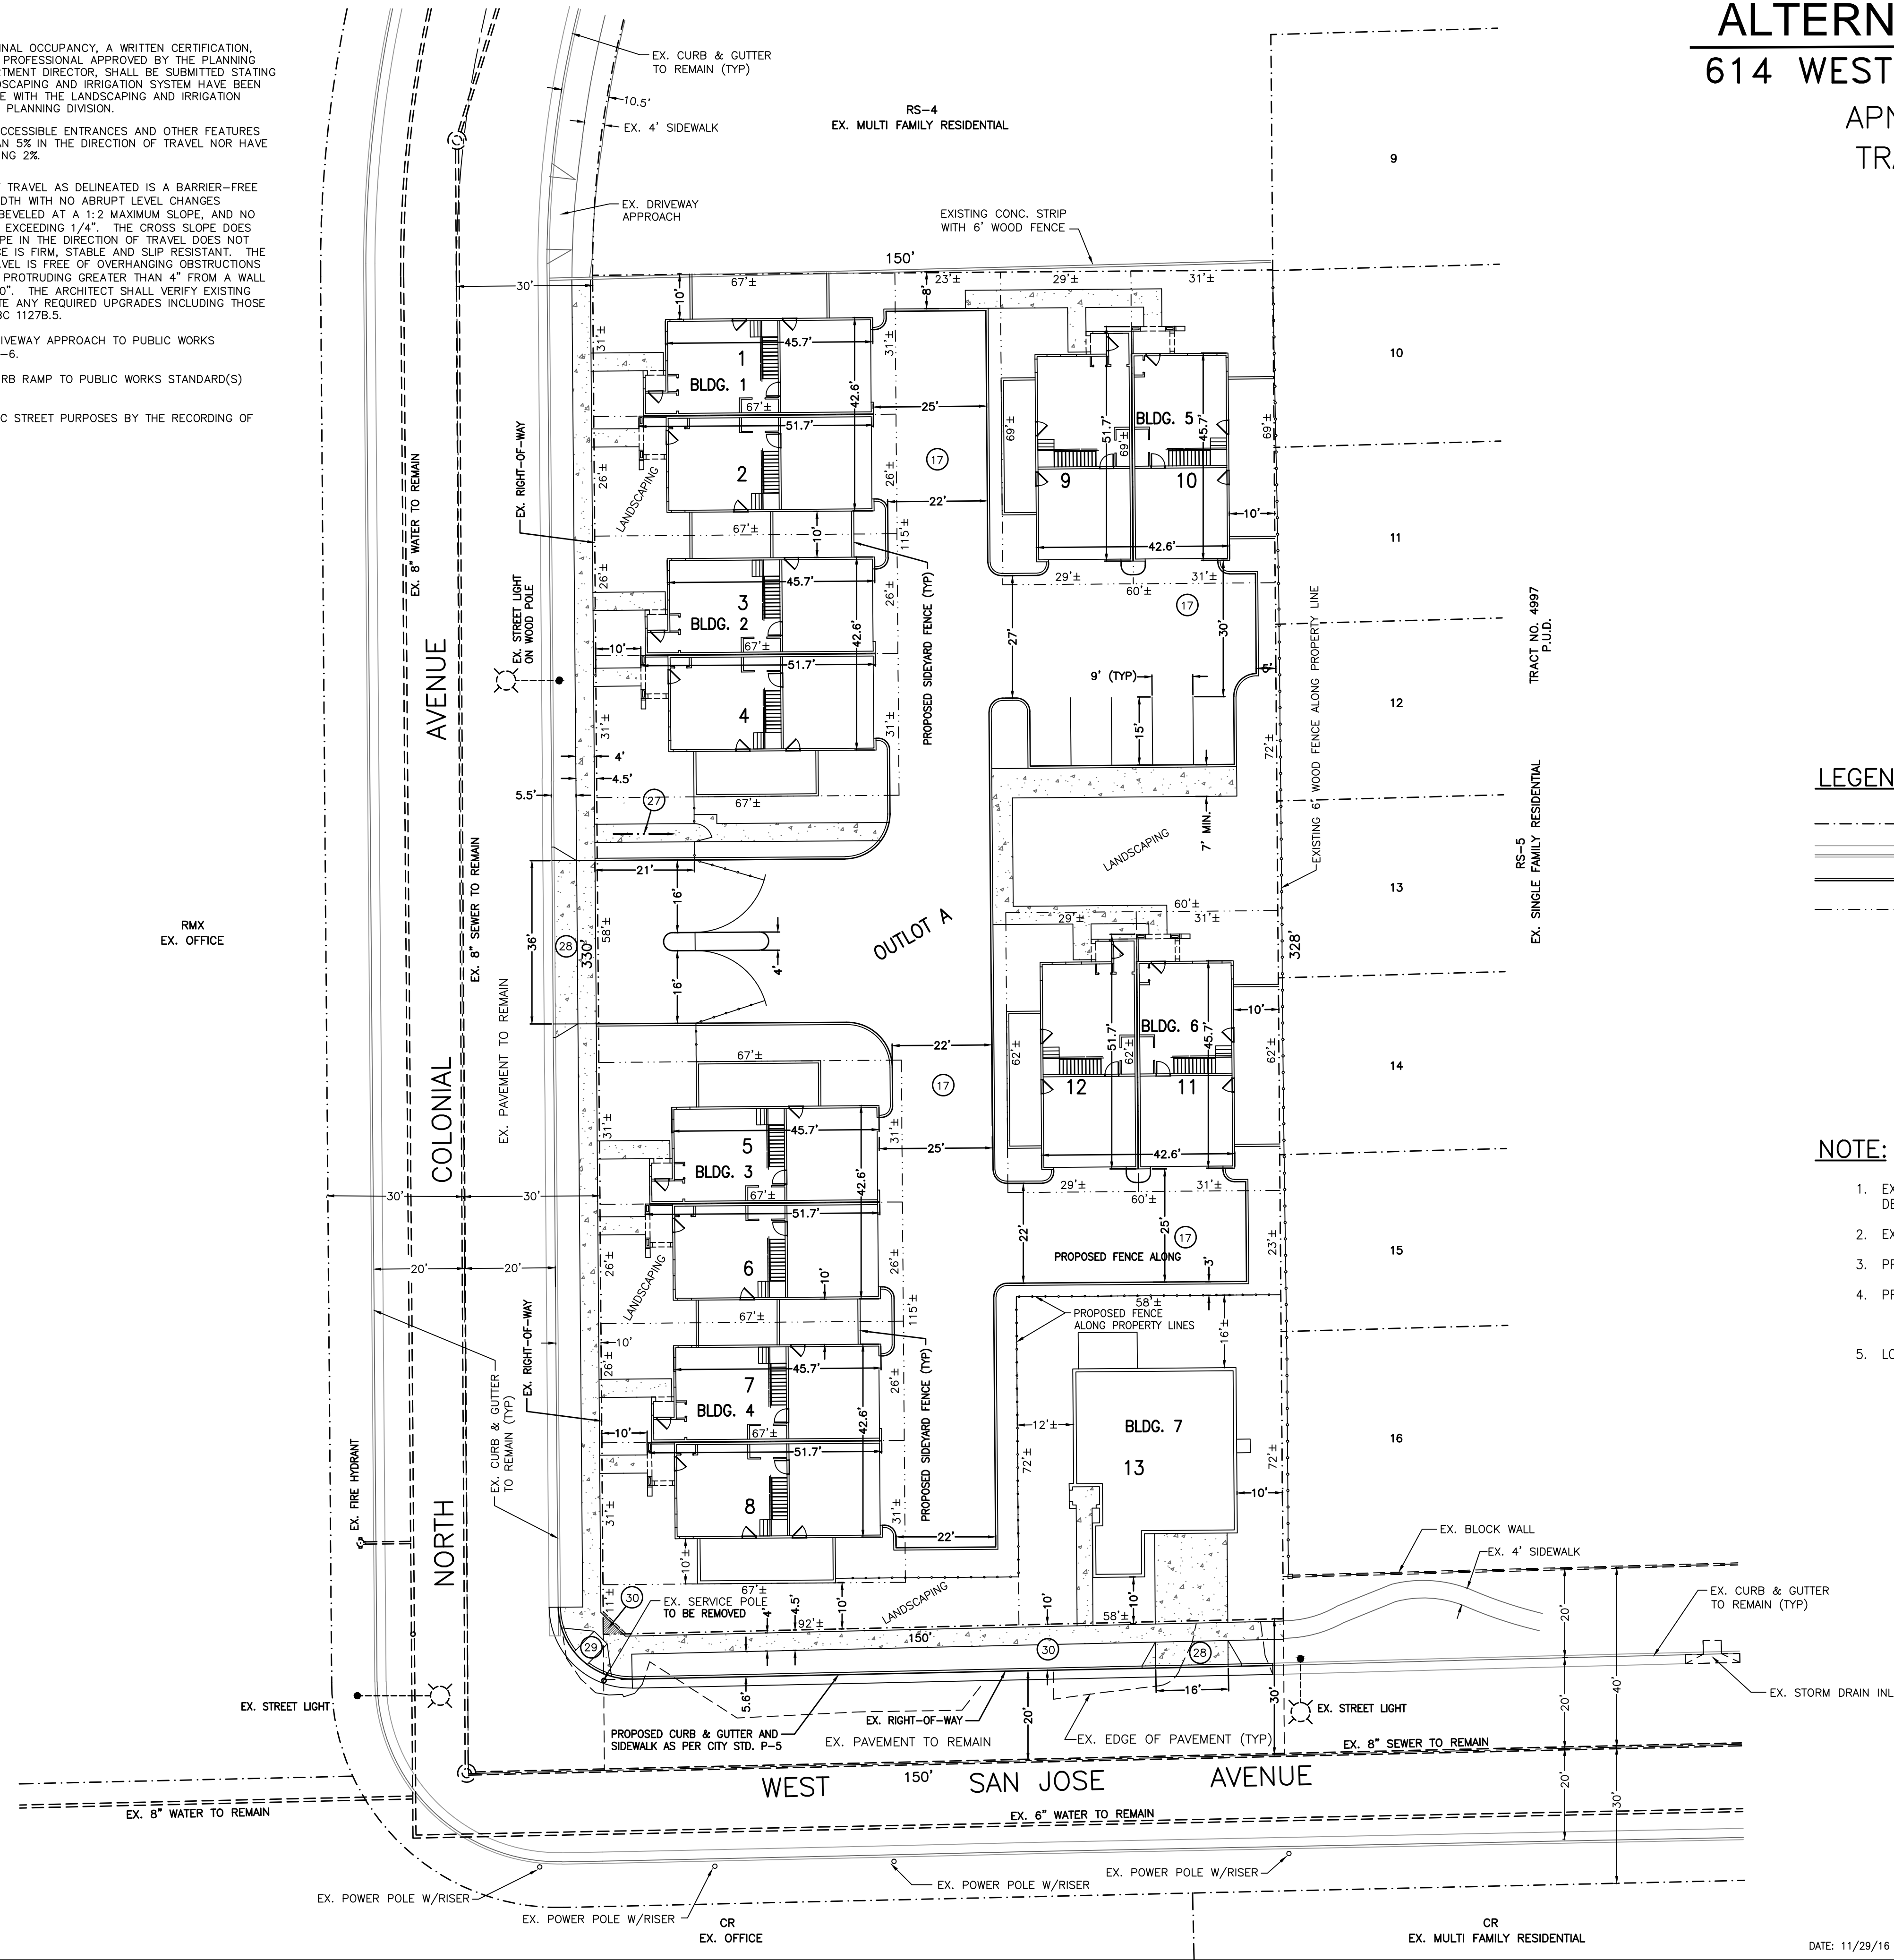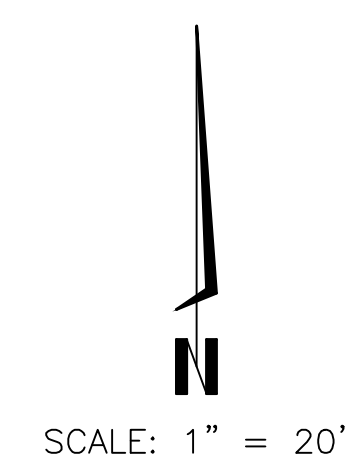

**LEGEND:**

- EXISTING PROPERTY LINE
- EXISTING CURB & GUTTER TO REMAIN
- PROPOSED 6" CURB
- PROPOSED PROPERTY LINE

**NOTE:**

- EXISTING PLANNED LAND USE: MEDIUM LOW DENSITY RESIDENTIAL
- EXISTING ZONING: RS-5
- PROPOSED ZONING: RS-5
- PROJECT SITE AREA: GROSS AREA = 1.13 ACRES NET AREA = 1.03 ACRES
- LOT COVERAGE IS 35.3%

APPL. NO. C-16-062 EXHIBIT A DATE 4-13-17  
 PROJ. ENG. \_\_\_\_\_ DATE \_\_\_\_\_  
 TRAFFIC ENG. \_\_\_\_\_ DATE \_\_\_\_\_  
 COND. APPROVAL BY \_\_\_\_\_ DATE \_\_\_\_\_  
 CITY OF FRESNO PLANNING & DEVELOPMENT DEPT

**GARY G. GIANNETTA**  
 CIVIL ENGINEERING & LAND SURVEYING  
 1119 "S" STREET  
 FRESNO, CA 93721  
 (559) 264-3590  
 DATE: 11/29/16  
 REV: 3/31/17